

euROSUN

LATEST SOLAR HOT WATER TECHNOLOGY




SAVE UP TO 80% ON YOUR WATER HEATING BILLS

HOW EUROSUN PV DIRECT WORKS



- Less maintenance
- No pumps to replace
- No moving parts to fail
- No plumbing on the roof
- Less weight on the roof
- Quick & easy installation
- Modern & Innovative design
- Diverse range of Solar collectors

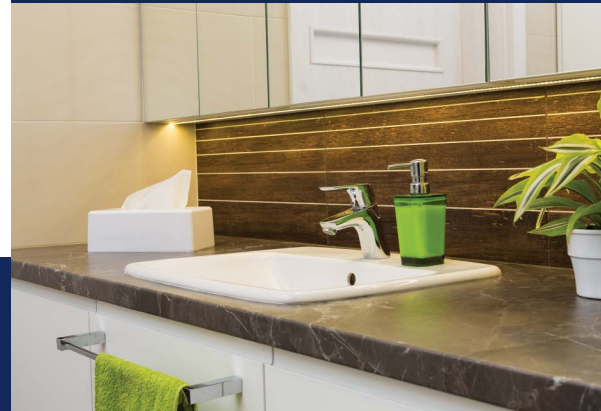

ELECTRIC OR GAS BOOSTING

Electric or Instantaneous gas boost ensures continuous hot water and only operates during periods of low solar contribution or high hot water demand.

Controller				
System Power (nom.)	1470W	2220W	2960W	3700W
Number of PV Panels	4 (2 x 2 Panels)	6 (2 x 3 Panels)	8 (2 x 4 Panels)	10 (2 x 5 Panels)
Height	220mm			
Width	145mm			

Electric Or Gas Boost Option				
Electric Boost	2.4kW	3.6Kw		
Gas Boost	17 L/h Instant	21 L/h Instant	26L/h Instant	32 L/h Instant

Cylinder			
Diameter	652mm	Rated Delivery	250L
Overall Height	1470mm	Boost Capacity	130L
Inlet Height	105mm	PTR (Hot Relief)	850 kPa
Outlet Height	1220mm	ECV (Cold Relief)	700 kPa
Storage Capacity	270L	Max Supply Temp	70°C

CONTACT US TODAY

P: 1300 808 786

E: sales@eurosun.com.au

W: eurosun.com.au